


# Wet Area Panelling Adhesive

**Trade Essentials Wet Area Panelling Adhesive is a high strength, polychloroprene rubber based adhesive/sealant supplied in a ready to use cartridge. It cures to form a tough, flexible heat resistant bond.**

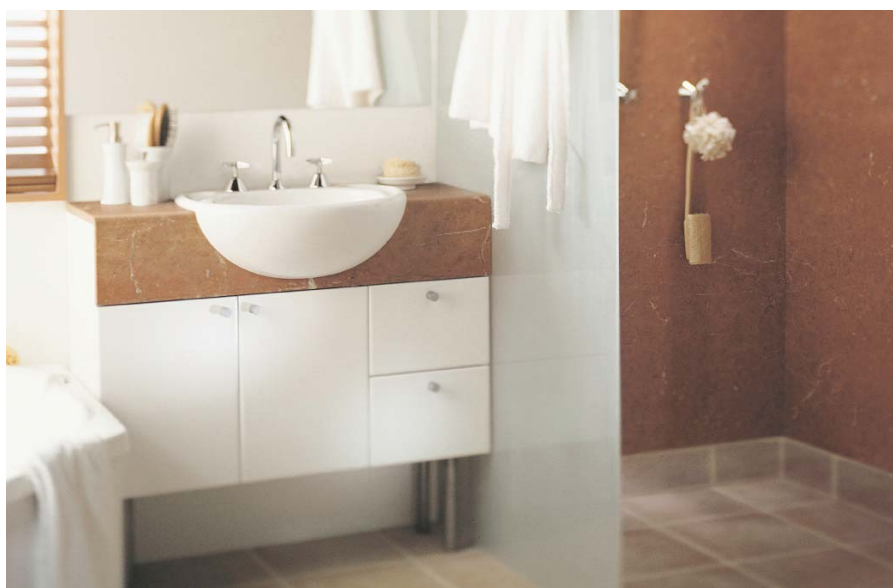

## APPLICATIONS

Wet Area Panelling Adhesive is recommended for bonding a wide variety of materials including timber; tileboard, hardboard, gyprock, steel, aluminium and cement sheet etc. It is ideal for the installation of most wallboards and interior panelling products.

It is not suitable for the bonding of polystyrene foam.

## TYPICAL PROPERTIES

Colour:	Pall Yellow
Solids:	42% approx.
Viscosity:	180,000 CPS @ 25°C approx.
Specific Gravity:	0.95kg/lt
Coverage:	A 300ml cartridge will form 15 metres of a 5mm bead.

## DIRECTIONS

Surfaces to be bonded must be clean and free from paint, oil, grease, dust etc. Apply a 5mm bead of Wet Area Panelling Adhesive to each stud, batten or frame section to be covered.

If fixing to a solid surface such as a brick or concrete wall, place dabs of adhesive spaced 150mm apart, 35mm in diameter and 4-5mm thick.

Position wall panelling to be bonded and press together ensuring a transference of half the adhesive to back of panel.

Pull the surfaces apart and allow the adhesive to dry for 5-15 minutes depending on weather conditions. Reposition the panelling and press the two surfaces together. Use a rubber mallet or a hammer and clean block of wood to ensure a complete bond. The joint will continue to gain strength for 2-3 days and maximum stress loading should not be applied until such time.

## CLEAN UP

Use Trade Essentials Adhesive Cleaner or Mineral Turpentine.

Please refer to Wet Area Panelling Installation Guide for detailed instructions on this product.

Please read the Material Safety Data Sheet for this product before it is used.