

# easyvj<sup>®</sup> easyregency<sup>®</sup>

create walls with style...it's easy



bathrooms




kitchens




walls & ceilings

more style | easy to install | **easycraft**<sup>®</sup>



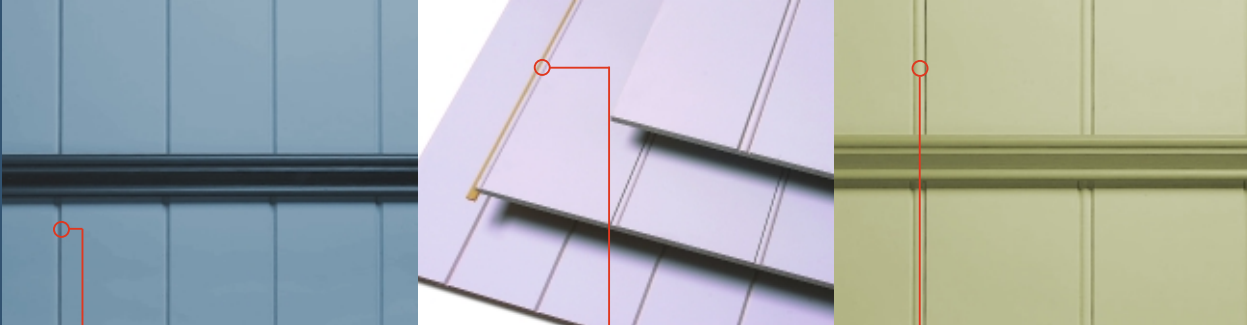


easyvj®

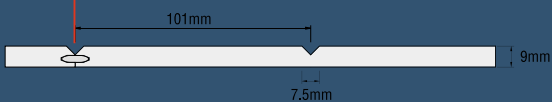

easyjoining system



easyregency®

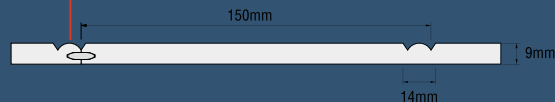

**PRODUCT DESCRIPTION**

EasyVJ and EasyRegency are made from Craftwood MR® moisture resistant MDF board and come in a range of sheet sizes ready to install and paint.

Easycraft panels are a high impact resistant board for walls and ceilings in internal applications. All sheets have a tongue and groove system along both long edges of the sheet for ease of alignment when installing.

EasyVJ and EasyRegency are primed with a superior coating ensuring you achieve a professional finish with minimal preparation.

EasyVJ has a standard groove spacing of 101mm centres and EasyRegency has a standard groove spacing of 150mm centres.

**APPLICATION**

Available in contemporary or heritage profiles EasyVJ and EasyRegency transform an ordinary wall or ceiling into a stunning feature.

Select from the range, for domestic housing, rumpus rooms, special needs housing, school assembly and sporting halls, waiting rooms or any area inside a building where pleasing aesthetics with a painted finish and/or high impact resistance is required.

EasyVJ and EasyRegency must not be exposed to water at any time. It is recommended you consult a building professional or AS 3740 1994 "Waterproofing of Wet Areas Within Residential Areas", for guidance when installing EasyVJ or EasyRegency in wet areas.

**PREPARATION**

- It is recommended sheets be acclimatised in the area where they are to be installed for 24-48 hours prior to installation
- It is recommended that the back of sheets be primed in all applications
- Frames should be straight and true
- Studs should be spaced at 450mm centres maximum
- When joining sheets "off the stud", noggins must be spaced at a maximum of 700mm centres
- When installing 900mm high panels and joining off studs, position a noggin at the top of the panel and a second noggin halfway down the panel

- When using EasyVJ and EasyRegency in ceiling applications, space battens at 450mm centres and noggins at 700mm centres
- When installing over masonry fix horizontal furring channels or battens at 450mm centres to the masonry wall to allow airflow

**FIXING**

- Sheets installed over frames should be fixed using flexible construction adhesive and nails or screws
- Apply construction adhesive in accordance with the manufacturer's instructions – usually 5mm thick beads.
- Plumb the first sheet using a spirit level
- Allow a 10mm gap at the floor and ceiling
- Allow 1mm to 1.5mm expansion gap per lineal metre at the joins for structural movement. Provision for structural movement becomes more critical as the area increases.

- Use 2.5mm bullet head anti-rust nails on walls
- Use 4 gauge anti-rust screws on walls or ceilings
- In all applications, fasteners should penetrate studs or battens 30mm - 40mm (Longer screws or nails will be required when installing over existing linings)
- Internal and external corners can be finished off with a timber moulding or similar

**FINISHING**

- EasyVJ and EasyRegency panels are primed ready for painting with oil or water based paints. Ask your paint supplier for recommendations on the best type of paint for your application
- All screw or nail holes should be filled with a building filler before painting. Follow the manufacturer's recommendations
- It is recommended that sheets be painted immediately after installation to minimise dimensional change of the sheets
- Plain Dado rails are available for covering horizontal joints. Rebated Dado rails are available to cover joints on installations over existing linings

**PRODUCT GUARANTEE**

EasyVJ and EasyRegency panels are guaranteed when installed in accordance with these instructions

**HEALTH & SAFETY**

Always use a face-mask (P1 or P2) when cutting Easycraft products

Material Safety Data Sheets are available upon request.

Power tools should be fitted with dust extractors.

Use safety glasses that comply with AS1337 when cutting or machining Easycraft products.

**PRODUCT TABLE**

PROFILES	SIZES
	STOCK OPTIONS
EasyVJ® and EasyRegency®	9mm
	900 X 1200
	2400 X 1200
	2700 X 1200
	3600 X 1200

**NOTES**

- Other sizes made to order. Minimum order quantity may apply outside Brisbane.
- Sizes are nominal. Check with your supplier for actual dimensions if required.

**TOOLS REQUIRED**

- TAPE MEASURE
- PENCIL
- SPIRIT LEVEL
- HAMMER
- HAND OR POWER SAW
- NAIL PUNCH
- DRILL/SCREWDRIVER
- CAULKING CARTRIDGE GUN
- SAFETY GLASSES - TO COMPLY WITH AS1337
- FACE MASK - P1 OR P2 DUST MASK
- PUTTY KNIFE
- SANDER BLOCK AND SAND PAPER
- PAINT BRUSH AND ROLLER

easycraft® | easyvj® / easyregency®

easycraft® | do it yourself

Other products offered in the **easycraft®** range

**easyclear® easyclad® easyline®**  
**easyascot® easydado**



**THE laminex GROUP**